

RANGE CODE MODEL FUNCTION

MI - 70 MAMCOOO2O4O FT78ELCG Griddles

**ITEM** 

# Electric griddle top with smooth chromed plate on open stand







RANGE CODE MODEL FUNCTION

MI - 70 MAMCOOO2O4O FT78ELCG Griddles

ITEM

## Electric griddle top with smooth chromed plate on open stand



### **TECHNICAL SPECIFICATIONS**

| WIDTH (mm):                   | 800                  |
|-------------------------------|----------------------|
| DEPTH (mm):                   | 750                  |
| HEIGHT (mm):                  | 900                  |
| WEIGHT (Kg):                  | 108                  |
| VOLUME (m <sup>3</sup> ):     | 0.8                  |
| EL. POWER (kW):               | 10.8                 |
| VOLTAGE:                      | VAC400-3N            |
| INTERNAL BASE UNIT DIM. (mm): | 720x400(h)x700 mm    |
| COOKING ZONES N°:             | 2                    |
| COOKING ZONES DIM. (mm):      | 735x53O mm           |
| COOKING ZONE DETAILS:         | 2x 5,4 kW            |
| PRODUCT SPECIFICATIONS:       | Smooth Chromed Plate |
| IP GRADE:                     | IPX5                 |
| TEMP. RANGE (°C):             | O-280 °C             |

#### **DESCRIPTION**

Freestanding electric griddle on open cabinet base, in AISI 3O4 stainless steel. 2O/IO pressed steel top with anti-spill front edge, designed for flush alignment with hermetic seal supplied. Top designed to accommodate water column accessory. Cooking surface with smooth mirror-polished chrome hotplate. Hotplate recessed 4O mm compared to worktop, fully welded construction for guaranteed ease of cleaning. Cooking surface with 65 mm cold zone at front of hotplate. Round Ø 4O mm drain hole for fat. Fat collection GN container located in lower compartment to assist and increase the liquid collection capacity. Heating by means of armoured elements in Incoloy. Heat control knob shaped to prevent water infiltration, equipped with integral indicator lights for instant recognition of heating and correct operation of the appliance. Cooking temperature thermostatically controlled, with adjustment from IIO to 280 °C. Safety thermostat trips in the event of working thermostat malfunction. Cooking surface 735x53O mm. Scraper supplied for smooth hotplate. The product complies with EC regulation 1935/2004 and Italian ministerial decree 2I/O3/1973 (Materials and Objects intended to come into contact with Food) MOCA. IPX5 water-resistant rating. Appliance equipped with stainless steel adjustable feet.





RANGE CODE

MODEL

**FUNCTION** 

MI - 70


MAMC0002040

FT78ELCG

Griddles

**ITEM** 

## Electric griddle top with smooth chromed plate on open stand

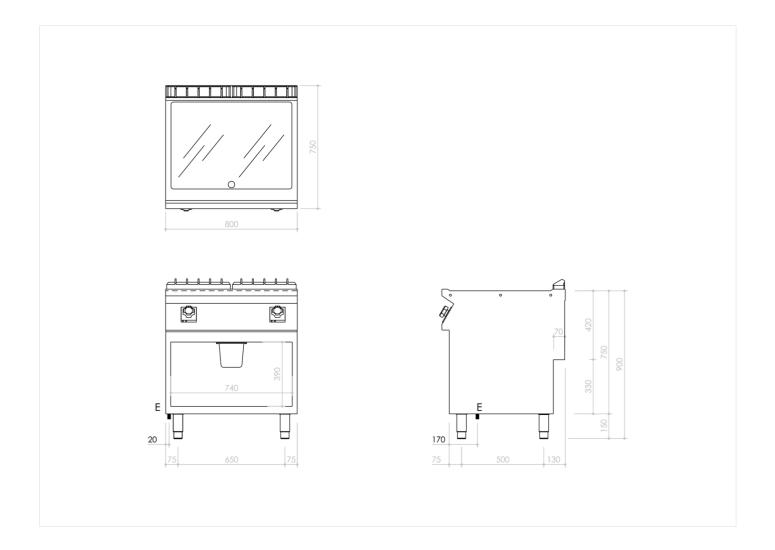

### **INSTALLATION SPECIFICATIONS**

(E) Electrical Connection:

VAC400-3N 50/60 Hz

